


# AIRTOWER CLIMATE PACKAGE

---

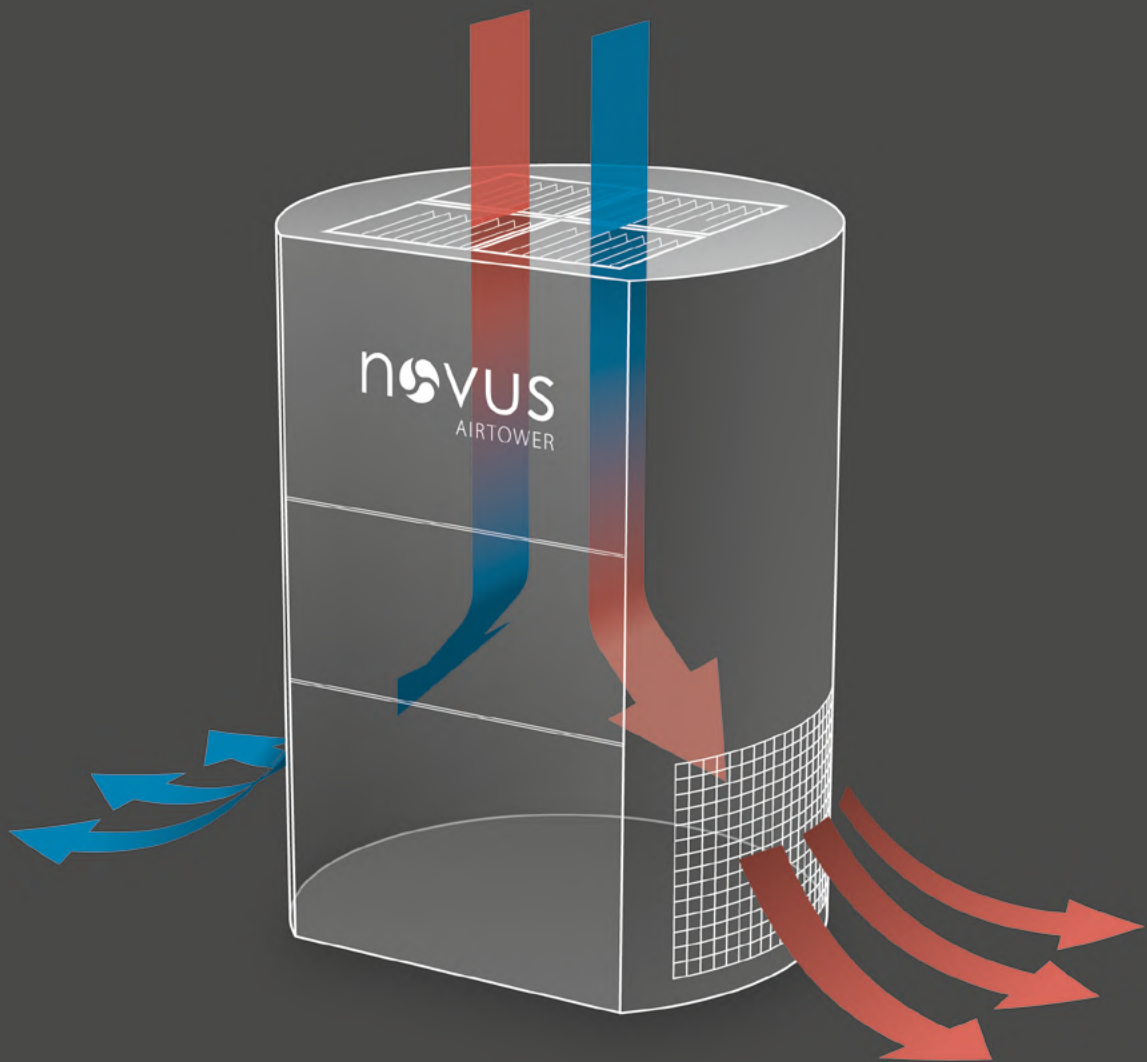

---

*Maintain the ideal indoor climate while simultaneously lowering your energy expenses!*

- + *Cool/Heat and Filter with a single system*
- + *Improve the indoor air climate by controlling the discharge temperature*
- + *Reduce heating and energy costs*
- + *Staff favourite*

**Our AIRTOWER with climate package** – Thanks to our many years of experience developing air cleaning units, we have optimised the AIRTOWER to suit your needs and added many optional packages.

You now get a standard product with an improved inflow of air to the filter cartridges and a streamlined floor-level air discharge. The filtered, temperature-adjusted air is returned to the space without causing draughts in a 270° radius, not only distributing the air in an ideal manner but also offering another unbeatable advantage: the larger the discharge area, the lower the discharge speed.

**AIRTOWER + climate package** – As well as its strengths in extraction and filtering, the AIRTOWER plus climate package also creates a pleasant indoor climate in your production department. Depending on the design and area of use, the AIRTOWER can be fitted with heat exchangers to individually adjust the discharge temperature.

That makes work more pleasant on especially hot or cold days. The result: lower energy costs, accompanied by greater staff motivation. It is not without reason that the Airtower leads the market in low-noise, energy-efficient filter towers.

## Performance parameters

	<b>FT 5.000</b>	<b>FT 10.000</b>	<b>FT 15.000</b>	<b>FT 20.000</b>
Flow rate (configured)	5.000 m <sup>3</sup> /h	10.000 m <sup>3</sup> /h	15.000 m <sup>3</sup> /h	20.000 m <sup>3</sup> /h
<b>Cooling function   heating function</b>				
VL water	10°C   50°C			
RL water	15°C   35°C			
Air inlet temperature	25°C   18°C			
Discharge temperature	19°C   27°C			
Cooling   heating capacity	10,5 kW   15,0 kW	20,1 kW   30,2 kW	30,2 kW   45,2 kW	40,2 kW   60,3 kW